




GREASE PUMP **(PNEUMATICALLY OPERATED)**

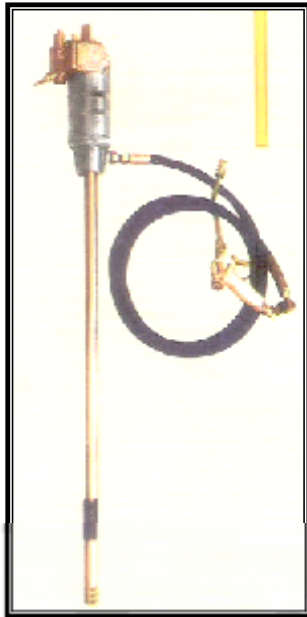

air-operated grease pump can be directly mounted on a standard 200 Kg. barrel, using our follower plate and drum cover. The pump can deliver 300 to 400 gm. of grease per minute. The hose reel can be connected to the delivery side of the unit if required, Capable of developing a block pressure of 425 Kgf/Sq.Cm. The pump has a working ratio 50:1.

ENGINEERING DATA

Pressure Ratio	:	50 : 1
Output at 8.5Kgf/Sq.Cm.	:	300 – 400 Gram
Working Pressure Range	:	4.5 – 10.5 Kgf/Sq.Cm.
Of Air		
Recommended W.P.	:	8.5 Kgf/Sq.Cm.
Normal Block Pressure at		
8.5 Kgf/Sq.Cm.	:	425 Kgf/Sq.Cm.
Air Requirement (FAD)	:	325 lpm
Type Of Hose	:	Wire Braided, Oil Resistant, High Pressure
Delivery Hose Length	:	2.2 Mtrs.
ID Of Hose	:	6 mm.
Drum Capacity	:	200 litres



38, Bibijan Street, 1st Floor, Office No.20, (Off Nagdevi Street) Mum-3.
Tel No- 23447152, 23439556 Fax- 23420498 Email: vijayeng1@hotmail.com
www.vijaylube.com